

High Power Type

12.5kWh Battery Module



- › Optimized liquid cooling battery solution for marine applications
- › Fully compliant with maritime safety standards and rules
- › Exceptionally high power performance (Up to 75kW)
- › Optimal thermal management via liquid cooling feature
- › IP54 compliant enclosure
- › Unparalleled safety design to support hazard-free operations
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years*)
- › Scalable up to multiple MWh with virtually no limit
- › Highly intelligent BMS** for sophisticated system control and monitoring

*Depending on the load profile, the warranty condition may differ / **BMS: Battery Management System

System Configuration

Item	Specification	Remarks
Configuration	Up to 12 modules in series	Module + KOL BPU-2-IS-A + Fuse Box

Module Specification

Model: KOL-20S-HP-85-125-IM-E

Item	Specification	Remarks	
Electrical			
Module Configuration	2P20S	Cell:125255255G1H (85Ah)	
Installed Energy	12.5kWh	-	
Usable Energy	11.5kWh	@ 1P discharge, BOL	
Nominal Voltage	73.6Vdc	-	
Operating Voltage Range	64 ~82.6Vdc	-	
Max. Charge Power	25.0kW	@ 2P, 1 Cycle	
Max. Charge Current	340A	@ 2C, 1 Cycle	
Rated Charge Power	12.5kW	@ 1P	
Rated Charge Current	170A	@ 1C	
Peak Discharge Power	75.0kW	@ 6P, ≤10 sec, ≥SOC 50%	
Peak Discharge Current	1020A	@ 6C, ≤10 sec, ≥SOC 50%	
Max. Discharge Power	36.2kW	@ 2.9P, 1 Cycle	
Max. Discharge Current	493A	@ 2.9C, 1 Cycle	
Rated Discharge Power	12.5kW	@ 1P	
Rated Discharge Current	170A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Mechanical			
Dimension	335 (W) x 716 (D) x 433 (H) mm	± 2mm, excl. Terminals & Connectors	
Weight	124kg	± 5%	
IP Grade	54	-	
Communication			
Communication Interface	Ethernet/RS-485/CAN2.0B	ModBus TCP/ModBus RTU	
Monitoring	RS-232C	-	
Environment			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		22 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 Year	-20 ~ 25°C	SOC 50 ± 5%
	6 Months	25 ~ 35°C	
	3 Months	35 ~ 45°C	
	< 1 Week	45 ~ 60°C	
Expected Cycle & Calendar Life**			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
Certifications			
Certification	UL1642, CB, UN38.3	@ Cell Level	
	UL1973	@ Cell Level, Available by 3Q 2020	
	UL9540A	@ Cell Level, Available by 4Q 2020	
	DNV-GL	@ Module Level, Available by 4Q 2020	

*P : Power-rate / C : Current-rate

**Depending on the load profile, the warranty condition may differ

BPU Specification

Model: KOL BPU-2-IS-A

Item	Specification	Remarks
General		
Embedded Safety Devices	String BMS, Switch Disconnecter, contactor, etc.	Fuse box is provided separately
Electrical		
Input Supply Power	DC 24V External Power	@ Max. Current 500A
On/ Off Management	Manual Switch	-
String BMS self-consumption	<3.6W	-
Operating Max. Voltage	1,000Vdc	-
Operating Max. Current	500A	-
Mechanical		
Dimension	335 (W) x 716 (D) x 433 (H) mm	± 2mm, Excl. Terminals & Connectors
Weight	50kg	± 5%
IP Grade	54	-
Communication		
Communication Interface	Ethernet/RS-485/CAN2.0B	ModBus TCP/ModBus RTU
Monitoring	RS-232C	-


*The BPU does not support parallel connection

Fuse Box Specification

Model: KOL Fuse Box-2

Item	Specification	Remarks
Electrical		
Rated Voltage	1,500Vdc	-
Rated Current	500A	-
Rated Breaking Capacity	100kA	-
Mechanical		
Dimension	304 (W) x 154 (D) x 244 (H) mm	± 2mm
Weight	6kg	± 5%
IP Grade	54	-

Up to 12 Modules in series

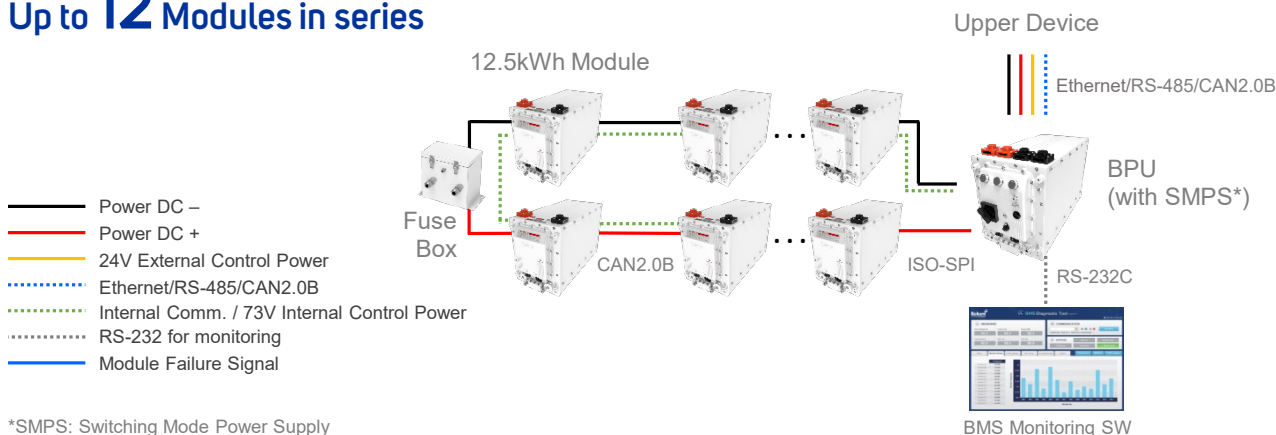

*SMPS: Switching Mode Power Supply

*The products above are references. The actual products may look different.

DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.